


**Product**

**LF. DP. PP WSM / CCK-P**

Sales Code : LDFDHCBC0 | Issued on : 30-10-2023

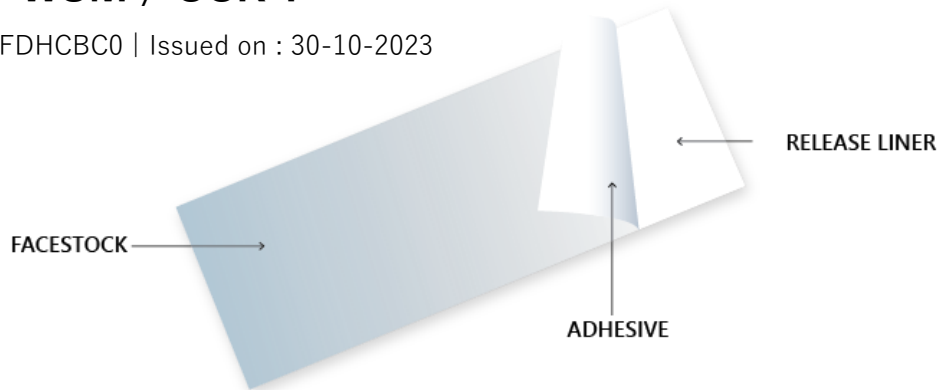

**FACESTOCK**

Color and appearance  
 Thickness  
 Tensile strength (MD)  
 Tensile strength (CD)

**Paper Look Film**

White matt film with special treatment for digital printing  
 80 µm ± 5 µm  
 172.57 N/mm<sup>2</sup>  
 51.63 N/mm<sup>2</sup>

**ADHESIVE**

Description

Camel adhesive formulation is aqueous dispersion of an acrylic copolymer which is a special adhesive for label stock.

Application Test

- 180° Peel strength test on stainless steel (FTM 1) is 8.482 N.
- Loop tack test (FTM 9) acceptance value min 6.0 N.
- 180° Peel strength test internal standard (PK/QC/21) min. 60 seconds.
- Service temperature range -20°C to 70°C.

**RELEASE LINER**

Basis weight  
 Thickness  
 Tensile strength (MD)  
 Tensile strength (CD)  
 Release force label film

**Clay Coated Kraft**

126 gsm ± 4%  
 138 µm ± 10 µm  
 11.11 kg/15 mm  
 5.06 kg/15 mm  
 Low release type : 0 – 30 gf

**SHELF LIFE**

One year when stored at room temperature (25°C; 55%RH)

**OTHER INFORMATION**

Total thickness 240 µm ± 10%

Due to the wide variety of possible uses and applications, customers should determine the suitability for their specific purpose before to use.