


Product

LF. PSG Inkjet / Glassine P-A

Sales Code : LFJCAIW1C0 | Issued on : 21-11-2023

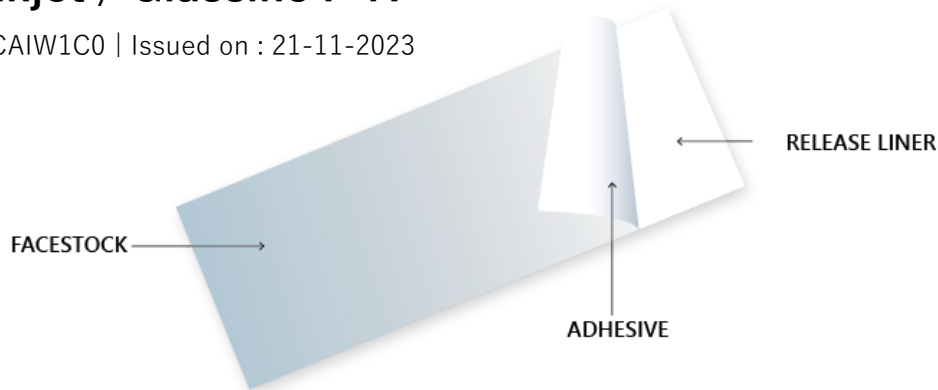

FACESTOCK

Color and appearance
 Thickness
 Tensile strength (MD)
 Tensile strength (CD)

BOPP (BIAXIALLY ORIENTED POLYPROPYLENE) FILM

White top coated for printability
 90 $\mu\text{m} \pm 6 \mu\text{m}$
 92.74 N/mm²
 149.96 N/mm²

ADHESIVE

Description
 Camel adhesive formulation is aqueous dispersion of an acrylic copolymer which is a special adhesive for label stock.

Application Test

- 180° Peel strength test on stainless steel (FTM 1) is 13.470 N.
- Loop tack test (FTM 9) acceptance value min 6.0 N.
- 180° Peel strength test internal standard (PK/QC/21) min. 90 seconds.
- Service temperature range -10°C to 70°C

RELEASE LINER

Basis weight
 Thickness
 Tensile strength (MD)
 Tensile strength (CD)
 Release force label film

GLASSINE RELEASE PAPER

60 gsm $\pm 4\%$
 55 $\mu\text{m} \pm 5 \mu\text{m}$
 7.46 kg/ 15 mm
 4.26 kg/ 15 mm
 Low release type : 0 – 15 gf

SHELF LIFE

One year when stored at room temperature (25°C; 55%RH)

OTHER INFORMATION

Total thickness 163 $\mu\text{m} \pm 10\%$

Due to the wide variety of possible uses and applications, customers should determine the suitability for their specific purpose before to use.