


Product

LF. Perak OPP B/ Glassine P-A

Sales Code : LFOMBGW1C0 | Issued on : 22-11-2023

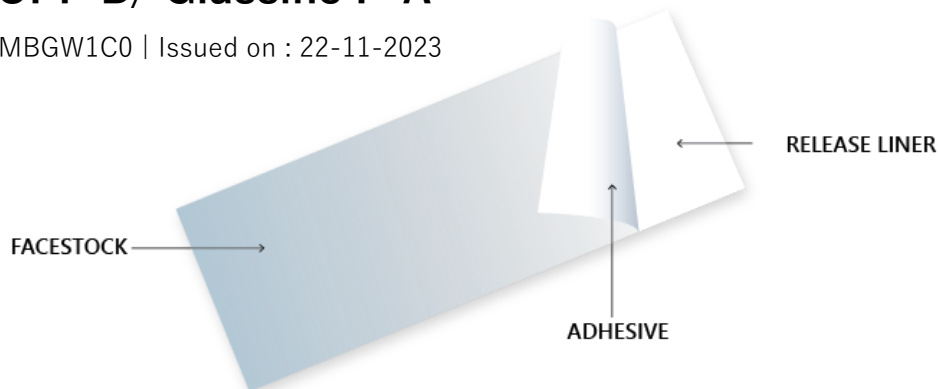

FACESTOCK

Thickness	50 µm ± 3 µm
Tensile strength (MD)	95.38 N/mm ²
Tensile strength (CD)	152.60 N/mm ²

OPP METALIZE SILVER

ADHESIVE

Description	Camel adhesive formulation is aqueous dispersion of an acrylic copolymer which is a special adhesive for label stock.
Application Test	<ul style="list-style-type: none"> - 180° Peel strength test on stainless steel (FTM 1) is 8.776 N. - Loop tack test (FTM 9) acceptance value min 6.0 N. - 180° Peel strength test internal standard (PK/QC/21) min. 90 seconds. - Service temperature range -10°C to 70°C

RELEASE LINER

Basis weight	60 gsm ± 4%
Thickness	55 µm ± 5 µm
Tensile strength (MD)	7.46 kg/ 15 mm
Tensile strength (CD)	4.26 kg/ 15 mm
Release force label film	Low release type : 0 – 15 gf

GLASSINE RELEASE PAPER

SHELF LIFE

One year when stored at room temperature (25°C; 55%RH)

OTHER INFORMATION

Total thickness	121 µm ± 10%
-----------------	--------------

Due to the wide variety of possible uses and applications, customers should determine the suitability for their specific purpose before to use.