


**Product**

**LF. Perak OPP / CCB “Camel”**

Sales Code : LFOCBGCAC0 | Issued on : 22-11-2023

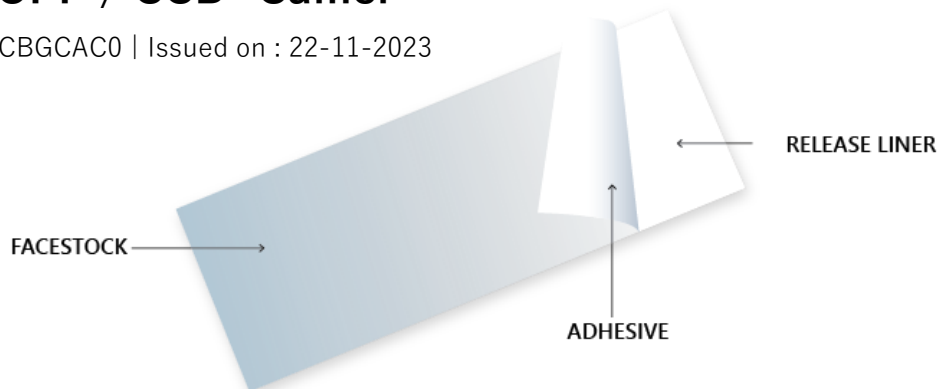

**FACESTOCK**

Thickness	50 µm ± 3 µm
Tensile strength (MD)	95.38 N/mm <sup>2</sup>
Tensile strength (CD)	152.60 N/mm <sup>2</sup>

**OPP METALIZE SILVER**

**ADHESIVE**

Description	Camel adhesive formulation is aqueous dispersion of an acrylic copolymer which is a special adhesive for label stock.
Application Test	<ul style="list-style-type: none"> <li>- 180° Peel strength test on stainless steel (FTM 1) is 4.498 N.</li> <li>- Loop tack test (FTM 9) acceptance value min 6.0 N.</li> <li>- 180° Peel strength test internal standard (PK/QC/21) min. 90 seconds.</li> <li>- Service temperature range -10°C to 70°C</li> </ul>

**RELEASE LINER**

Basis weight	174 gsm ± 4%
Thickness	156 µm ± 10 µm
Tensile strength (MD)	13.05 kg/ 15 mm
Tensile strength (CD)	9.90 kg/ 15 mm
Release force label film	Low release type : 0 – 15 gf

**CAST COAT BOARD WITH PE (POLYETHYLENE) LAMINATED**

**SHELF LIFE**

One year when stored at room temperature (25°C; 55%RH)

**OTHER INFORMATION**

Total thickness 225 µm ± 10%

Due to the wide variety of possible uses and applications, customers should determine the suitability for their specific purpose before to use.

