


Product

LF. VT-80EM / CCK-P (Large Format)

Sales Code : LFLGFJCBC0 | Issued on : 06-12-2023

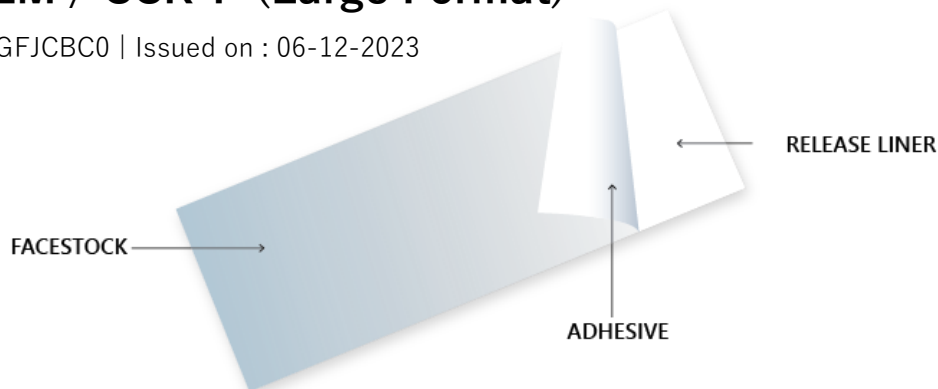

FACESTOCK

Thickness	80 $\mu\text{m} \pm 10 \mu\text{m}$
Tensile strength (MD)	26.06 N/mm ²
Tensile strength (CD)	24.67 N/mm ²

PVC TRANSLUCENT EMBOSSING

ADHESIVE

Description	Camel adhesive formulation is aqueous dispersion of an acrylic copolymer which is a special adhesive for large format label film.
Application Test	<ul style="list-style-type: none"> - 180° Peel strength test on stainless steel (FTM 1) after aging 20 minutes is 4.369 N. - 180° Peel strength test on stainless steel (FTM 1) after aging 24 hours is 6.801 N. - Loop tack test (FTM 9) acceptance value min 6.0 N. - Service temperature range -10°C to 70°C

RELEASE LINER

Basis weight	120 gsm $\pm 4\%$
Thickness	125 $\mu\text{m} \pm 10 \mu\text{m}$
Tensile strength (MD)	10.34 kg/ 15 mm
Tensile strength (CD)	4.57 kg/ 15 mm
Release force label paper	Low release type : 0 – 15 gf

CLAY COATED KRAFT

SHELF LIFE

One year when stored at room temperature (25°C; 55%RH)

OTHER INFORMATION

Total thickness 260 $\mu\text{m} \pm 10\%$
 Due to the wide variety of possible uses and applications, customers should determine the suitability for their specific purpose before to use.

