


**Product**

**LF. VW-80G (BO) / CCK-P (Large Format)**

Sales Code : LFLARGCBC0 | Issued on : 06-12-2023

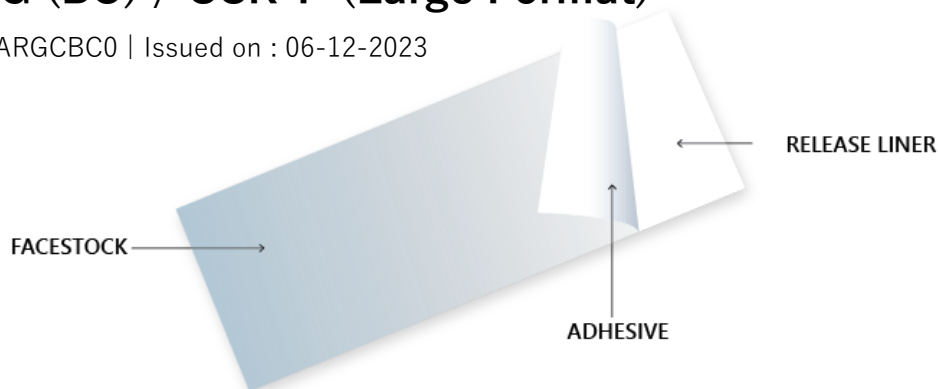

**FACESTOCK**

Appearance  
 Thickness  
 Tensile strength (MD)  
 Tensile strength (CD)

**PVC FILM**

White, soft  
 80  $\mu\text{m} \pm 10 \mu\text{m}$   
 46.16 N/mm<sup>2</sup>  
 32.21 N/mm<sup>2</sup>

**ADHESIVE**

Description: Camel adhesive formulation is aqueous dispersion of an acrylic copolymer which is a special adhesive for large format label film.

Application Test:

- 180° Peel strength test on stainless steel (FTM 1) after aging 20 minutes is 5.951 N.
- 180° Peel strength test on stainless steel (FTM 1) after aging 24 hours is 9.854 N.
- Loop tack test (FTM 9) acceptance value min 6.0 N.
- Service temperature range -10°C to 70°C

**RELEASE LINER**

Basis weight  
 Thickness  
 Tensile strength (MD)  
 Tensile strength (CD)  
 Release force label paper

**CLAY COATED KRAFT**

120 gsm  $\pm 4\%$   
 125  $\mu\text{m} \pm 10 \mu\text{m}$   
 10.34 kg/ 15 mm  
 4.57 kg/ 15 mm  
 Low release type : 0 – 15 gf

**SHELF LIFE**

One year when stored at room temperature (25°C; 55%RH)

**OTHER INFORMATION**

Total thickness: 230  $\mu\text{m} \pm 10\%$

Due to the wide variety of possible uses and applications, customers should determine the suitability for their specific purpose before to use.