


Product

LF. VW-80G / CCK-P (Large Format)

Sales Code : LFLAFGCBC0 | Issued on : 06-12-2023

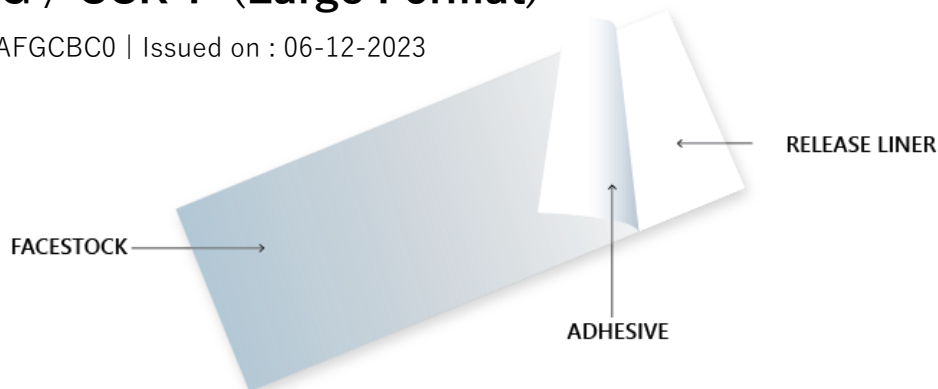

FACESTOCK

Appearance
 Thickness
 Tensile strength (MD)
 Tensile strength (CD)

PVC FILM

White, soft
 80 $\mu\text{m} \pm 10 \mu\text{m}$
 46.16 N/mm^2
 32.21 N/mm^2

ADHESIVE

Description: Camel adhesive formulation is aqueous dispersion of an acrylic copolymer which is a special adhesive for large format label film.

Application Test:

- 180° Peel strength test on stainless steel (FTM 1) after aging 20 minutes is 4.945 N.
- 180° Peel strength test on stainless steel (FTM 1) after aging 24 hours is 9.854 N.
- Loop tack test (FTM 9) acceptance value min 6.0 N.
- Service temperature range -10°C to 70°C

RELEASE LINER

Basis weight
 Thickness
 Tensile strength (MD)
 Tensile strength (CD)
 Release force label paper

CLAY COATED KRAFT

120 $\text{gsm} \pm 4\%$
 125 $\mu\text{m} \pm 10 \mu\text{m}$
 10.34 $\text{kg}/15 \text{ mm}$
 4.57 $\text{kg}/15 \text{ mm}$
 Low release type : 0 – 15 gf

SHELF LIFE

One year when stored at room temperature (25°C; 55%RH)

OTHER INFORMATION

Total thickness: 230 $\mu\text{m} \pm 10\%$

Due to the wide variety of possible uses and applications, customers should determine the suitability for their specific purpose before to use.