


**Product**

**LP. HVS-B / RLY-B**

Sales Code : LPHBEGC1C0 | Issued on : 15-09-2023

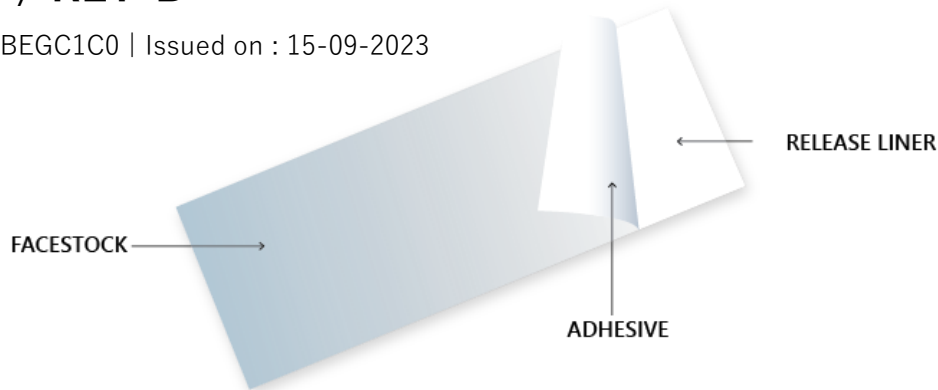

**FACESTOCK**

Color and appearance  
 Basis weight  
 Thickness  
 Tensile strength (MD)  
 Tensile strength (CD)

**WOODFREE WHITE PAPER**

White  
 60 gsm ± 4%  
 77 µm ± 5 µm  
 5.08 kg/15 mm  
 2.09 kg/15 mm

**ADHESIVE**

Description

Camel adhesive formulation is aqueous dispersion of an acrylic copolymer which is a special adhesive for label stock.

Application Test

- 180° Peel strength test on stainless steel (FTM 1) is paper tear.
- Loop tack test (FTM 9) acceptance value min 6.0 N.
- 180° Peel strength test internal standard (PK/QC/21) min. 45 seconds.
- Service temperature range -20°C to 70°C

**RELEASE LINER**

Basis weight  
 Thickness  
 Tensile strength (MD)  
 Tensile strength (CD)  
 Release force label paper

**WOODFREE LIGHT YELLOW WITH PE (POLYETHYLENE) LAMINATION**

72 gsm ± 4%  
 89 µm ± 10 µm  
 7.10 kg/ 15 mm  
 3.69 kg/ 15 mm  
 Low release type : 0 – 15 gf

**SHELF LIFE**

One year when stored at room temperature (25°C; 55%RH)

**OTHER INFORMATION**

Total thickness 172 µm ± 10%

Due to the wide variety of possible uses and applications, customers should determine the suitability for their specific purpose before to use.

