


Product

LF. DP PP MTLZ / CCK-P (IND)

Sales Code : LFDMDHCBC0 | Issued on : 06-12-2023

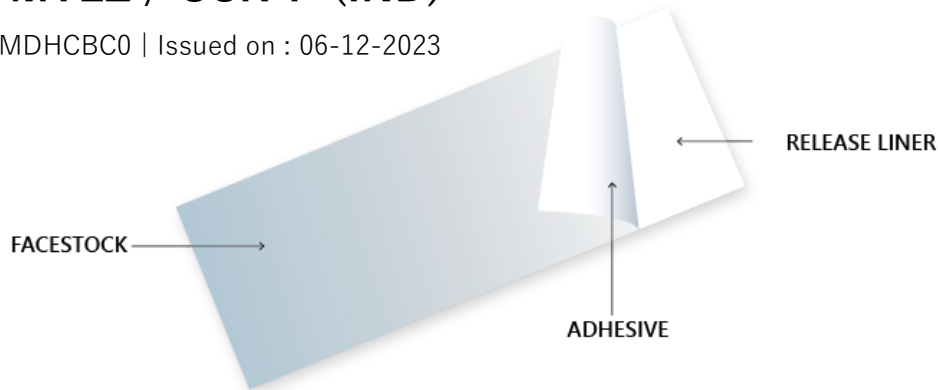

FACESTOCK

Color and appearance
 Thickness
 Tensile strength (MD)
 Tensile strength (CD)

BOPP (BIAXIALLY ORIENTED POLYPROPYLENE) METALIZE SILVER FILM

Metalize film with special treatment for digital printing
 50 µm ± 3 µm
 95.38 N/mm²
 152.60 N/mm²

ADHESIVE

Description
 Application Test

Camel adhesive formulation is aqueous dispersion of an acrylic copolymer which is a special adhesive for digital printing.
 - 180° Peel strength test on stainless steel (FTM 1) is 7.821 N.
 - Loop tack test (FTM 9) acceptance value min 6.0 N.
 - 180° Peel strength test internal standard (PK/QC/21) min. 60 seconds.
 - Service temperature range -10°C to 70°C

RELEASE LINER

Basis weight
 Thickness
 Tensile strength (MD)
 Tensile strength (CD)
 Release force label paper

CLAY COATED KRAFT

126 gsm ± 4%
 138 µm ± 10 µm
 11.11 kg/ 15 mm
 5.06 kg/ 15 mm
 Low release type : 0 – 30 gf

SHELF LIFE

One year when stored at room temperature (25°C; 55%RH)

OTHER INFORMATION

Total thickness 226 µm ± 10%
 Total grammage 191 gsm ± 5%
 Paper type 160 gsm

Due to the wide variety of possible uses and applications, customers should determine the suitability for their specific purpose before to use.