


Product

LF. Digiprint PP WSM / CCK-P (IND)

Sales Code : LFDJDHCBC0 | Issued on : 06-12-2023

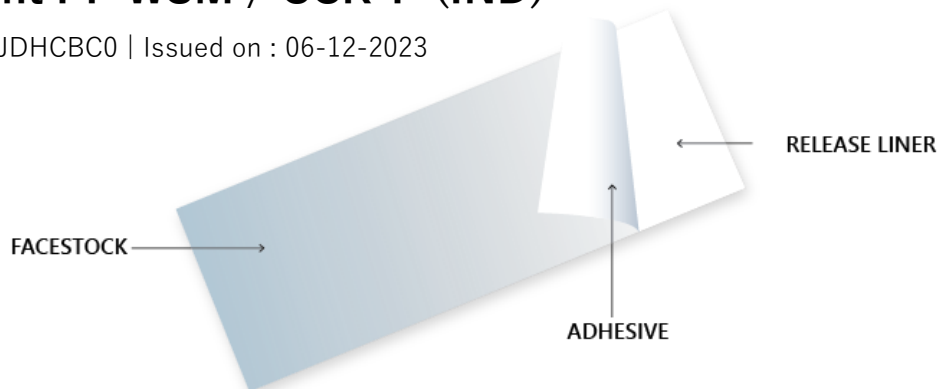

FACESTOCK

Color and appearance
 Thickness
 Tensile strength (MD)
 Tensile strength (CD)

PAPER LOOK FILM

White matte film with special treatment for HP Indigo
 80 $\mu\text{m} \pm 5 \mu\text{m}$
 51.63 N/mm²
 172.57 N/mm²

ADHESIVE

Description: Camel adhesive formulation is aqueous dispersion of an acrylic copolymer which is a special adhesive for digital printing.

Application Test:

- 180° Peel strength test on stainless steel (FTM 1) is 8.649 N.
- Loop tack test (FTM 9) acceptance value min 6.0 N.
- 180° Peel strength test internal standard (PK/QC/21) min. 60 seconds.
- Service temperature range -10°C to 70°C

RELEASE LINER

Basis weight
 Thickness
 Tensile strength (MD)
 Tensile strength (CD)
 Release force label paper

CLAY COATED KRAFT

126 gsm $\pm 4\%$
 138 $\mu\text{m} \pm 10 \mu\text{m}$
 11.11 kg/ 15 mm
 5.06 kg/ 15 mm
 Low release type : 0 – 30 gf

SHELF LIFE

One year when stored at room temperature (25°C; 55%RH)

OTHER INFORMATION

Total thickness: 261 $\mu\text{m} \pm 10\%$
 Total grammage: 211 gsm $\pm 5\%$
 Paper type: 170 gsm

Due to the wide variety of possible uses and applications, customers should determine the suitability for their specific purpose before to use.