


Product

LF. OPP TR-A / Glassine P-A (WT)

Sales Code : LFODLHW1C0 | Issued on : 16-11-2023

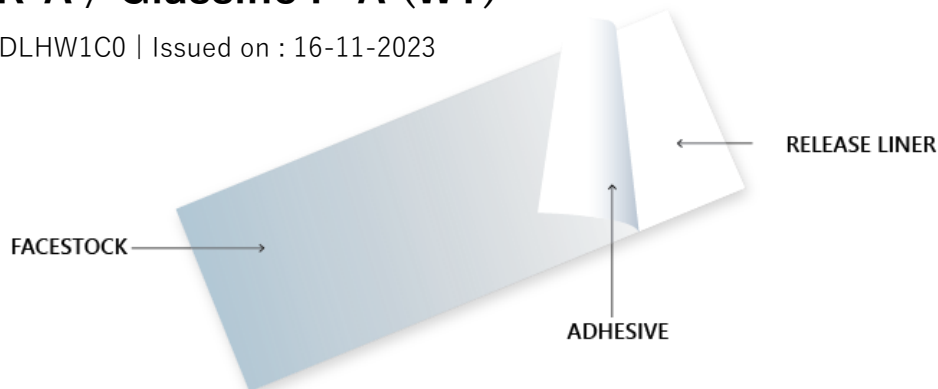

FACESTOCK

Color and appearance
 Thickness
 Tensile strength (MD)
 Tensile strength (CD)

BOPP (BIAXIALLY ORIENTED POLYPROPYLENE) FILM

Top treated for printability
 50 $\mu\text{m} \pm 3 \mu\text{m}$
 81.81 N/mm²
 197.61 N/mm²

ADHESIVE

Description

Solvent base removable adhesive is acrylic solution which insoluble in water and special adhesive for removable.

Application Test

- 180° Peel strength test on stainless steel (FTM 1) is 3.227 N.
- 180° Peel strength test internal standard (PK/QC/21) max. 45 seconds.
- Service temperature range -20°C to 70°C

RELEASE LINER

Basis weight
 Thickness
 Tensile strength (MD)
 Tensile strength (CD)
 Release force label film

GLASSINE RELEASE PAPER

60 gsm $\pm 4\%$
 55 $\mu\text{m} \pm 5 \mu\text{m}$
 7.46 kg/ 15 mm
 4.26 kg/ 15 mm
 Low release type : 0 – 15 gf

SHELF LIFE

One year when stored at room temperature (25°C; 55%RH)

OTHER INFORMATION

Total thickness 124 $\mu\text{m} \pm 10\%$

Due to the wide variety of possible uses and applications, customers should determine the suitability for their specific purpose before to use.