


Product

LF. OPP TR A / PET (WT)

Sales Code : LFODLHPAC0 | Issued on : 16-11-2023

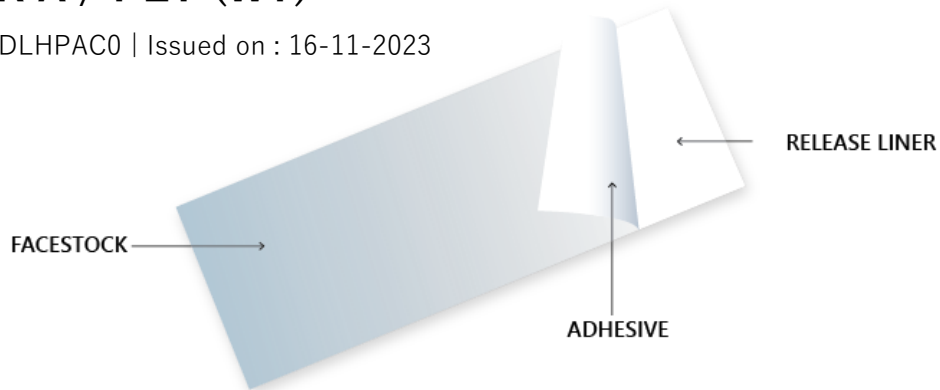

FACESTOCK

Color and appearance
 Thickness
 Tensile strength (MD)
 Tensile strength (CD)

BOPP (BIAXIALLY ORIENTED POLYPROPYLENE) FILM

Top treated for printability
 50 µm ± 3 µm
 81.81 N/mm²
 197.61 N/mm²

ADHESIVE

Description: Solvent base removable adhesive is acrylic solution which insoluble in water and special adhesive for removable application.

Application Test:

- 180° Peel strength test on stainless steel (FTM 1) is 6.215 N.
- 180° Peel strength test internal standard (PK/QC/21) max. 45 seconds.
- Service temperature range -10°C to 70°C

RELEASE LINER

Thickness
 Release force label film

POLYESTER TRANSPARENT

23 µm ± 3 µm
 Low release type : 0 – 15 gf

SHELF LIFE

One year when stored at room temperature (25°C; 55%RH)

OTHER INFORMATION

Total thickness 95 µm ± 10%

Due to the wide variety of possible uses and applications, customers should determine the suitability for their specific purpose before to use.