


Product

LF. INKJET WG-WG58 "CAMEL"

Sales Code : LFJIAIW1C0 | Issued on : 22-01-2025

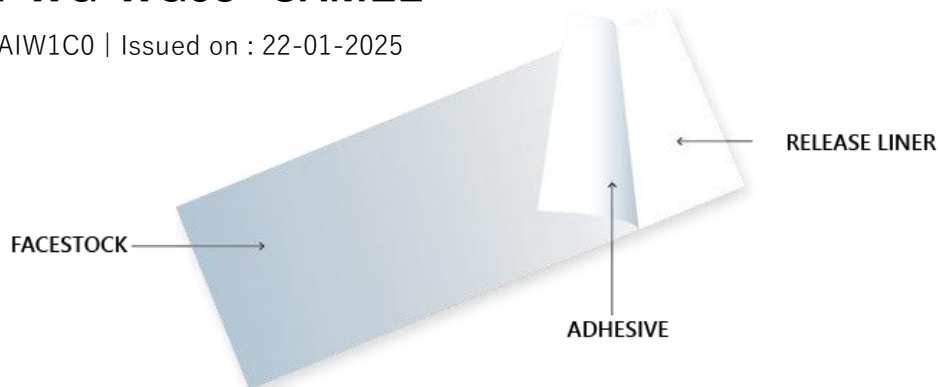

FACESTOCK

Color and appearance
 Thickness
 Tensile strength (MD)
 Tensile strength (CD)

BOPP (BIAXIALLY ORIENTED POLYPROPYLENE) FILM

White top coated for printability
 90 $\mu\text{m} \pm 6 \mu\text{m}$
 92.24 N/mm²
 149.96 N/mm²

ADHESIVE

Description

Camel adhesive formulation is aqueous dispersion of an acrylic copolymer which is a special adhesive for label stock.

Application Test

- 180° Peel strength test on stainless steel (FTM 1) is 13.581 N.
- Loop tack test (FTM 9) acceptance value min 7.0 N.
- 180° Peel strength test internal standard (PK/QC/21) min. 90 seconds.
- Service temperature range -10°C to 70°C

RELEASE LINER

Basis weight
 Thickness
 Tensile strength (MD)
 Tensile strength (CD)
 Release force label film

GLASSINE RELEASE PAPER

59 gsm $\pm 4\%$
 52 $\mu\text{m} \pm 5 \mu\text{m}$
 8.27 kg/ 15 mm
 3.53 kg/ 15 mm
 Low release type : 0 – 15 gf

SHELF LIFE

One year when stored at room temperature (25°C; 55%RH)

OTHER INFORMATION

Total thickness 163 $\mu\text{m} \pm 10\%$

Due to the wide variety of possible uses and applications, customers should determine the suitability for their specific purpose before to use.