


Product

LFDP-PETMM36-CCKP "CAMEL"

Sales Code : LFDRDHCB0 | Issued on : 20-01-2025

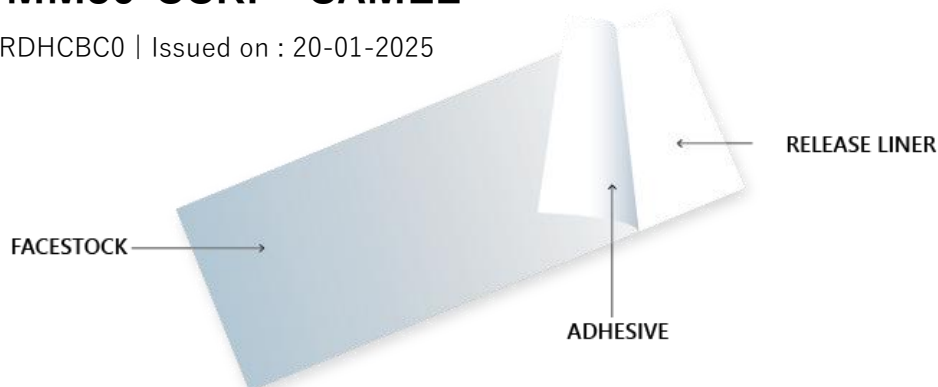

FACESTOCK

Color and appearance
Thickness
Tensile strength (MD)
Tensile strength (CD)

PET METALIZE MATT

Metalize film with special treatment for digital printing
36 $\mu\text{m} \pm 3 \mu\text{m}$
126.03 N/mm²
104.36 N/mm²

ADHESIVE

Description Camel adhesive formulation is aqueous dispersion of an acrylic copolymer which is a special adhesive for label stock.

Application Test

- 180° Peel strength test on stainless steel (FTM 1) is 8.147 N.
- Loop tack test (FTM 9) acceptance value min 6.0 N.
- 180° Peel strength test internal standard (PK/QC/21) min. 60 seconds.
- Service temperature range -10°C to 70°C.

RELEASE LINER

Basis weight
Thickness
Tensile strength (MD)
Tensile strength (CD)
Release force label film

CLAY COATED KRAFT

126 gsm $\pm 4\%$
138 $\mu\text{m} \pm 10 \mu\text{m}$
11.11 kg/15 mm
5.06 kg/15 mm
Low release type : 0 – 30 gf

SHELF LIFE

One year when stored at room temperature (25°C; 55%RH)

OTHER INFORMATION

Total thickness 192 $\mu\text{m} \pm 10\%$
Total grammage 186 gsm $\pm 5\%$
Paper Type 160 gsm

Due to the wide variety of possible uses and applications, customers should determine the suitability for their specific purpose before to use.

