


**Product**

**LFDP-TAFFETA-CCKP “CAMEL”**

Sales Code : LFDTDICBC0 | Issued on : 20-01-2025

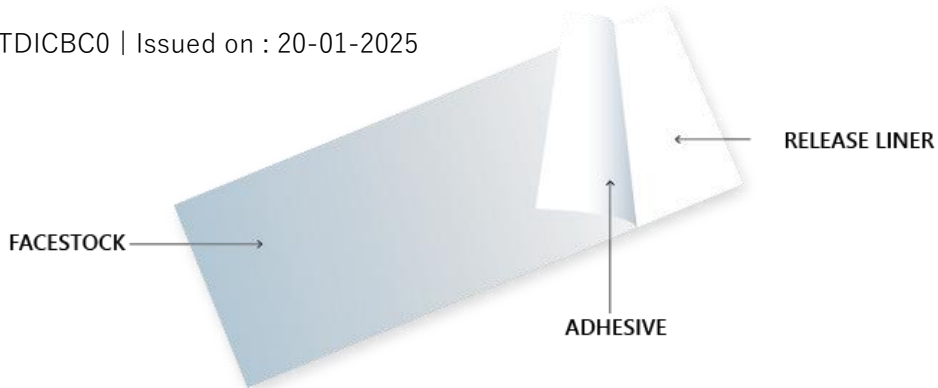

**FACESTOCK**

Color and appearance  
 Thickness  
 Tensile strength (MD)  
 Tensile strength (CD)

**TAFETA FILM**

Milky white and emboss film  
 76 µm ± 4%  
 78. N/mm<sup>2</sup>  
 160.55 N/mm<sup>2</sup>

**ADHESIVE**

Description Camel adhesive formulation is aqueous dispersion of an acrylic copolymer which is a special adhesive for label stock.

Application Test

- 180° Peel strength test on stainless steel (FTM 1) is 7.263 N.
- Loop tack test (FTM 9) acceptance value min 6.0 N.
- 180° Peel strength test internal standard (PK/QC/21) min. 60 seconds.
- Service temperature range -10°C to 70°C.

**RELEASE LINER**

Basis weight  
 Thickness  
 Tensile strength (MD)  
 Tensile strength (CD)  
 Release force label film

**CLAY COATED KRAFT**

126 gsm ± 4%  
 138 µm ± 10 µm  
 11.11 kg/15 mm  
 5.06 kg/15 mm  
 Low release type : 0 – 30 gf

**SHELF LIFE**

One year when stored at room temperature (25°C; 55%RH)

**OTHER INFORMATION**

Total thickness 273 µm ± 10%

Due to the wide variety of possible uses and applications, customers should determine the suitability for their specific purpose before to use.

