


**Product**

**LP-SC80-2WG58 “CAMEL”**

Sales Code : LPAAAGW3C0 | Issued on : 14-10-2024

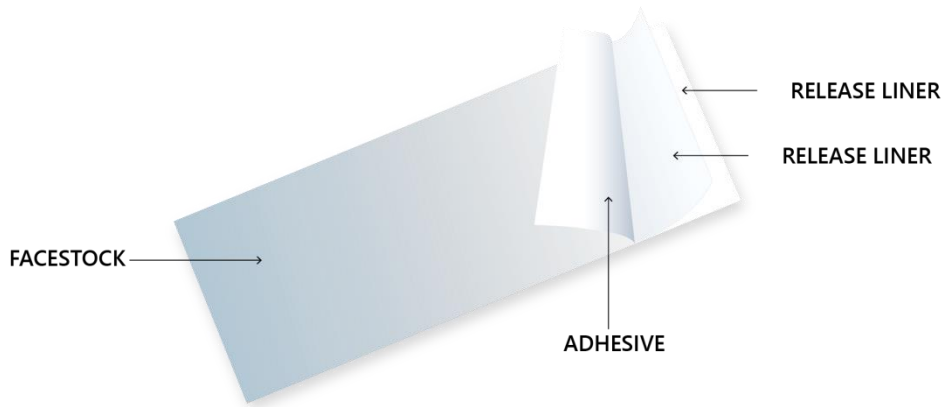

**FACESTOCK**

Color and appearance  
 Basis weight  
 Thickness  
 Tensile strength (MD)  
 Tensile strength (CD)

**ART PAPER**

White  
 80 gsm ± 4%  
 63 µm ± 5 µm  
 4.42 kg/15 mm  
 1.89 kg/15 mm

**ADHESIVE**

Description

Camel adhesive formulation is aqueous dispersion of an acrylic copolymer which is a special adhesive for label stock.

Application Test

- 180° Peel strength test on stainless steel (FTM 1) is paper tear.
- Loop tack test (FTM 9) acceptance value min 6.0 N.
- 180° Peel strength test internal standard (PK/QC/21) min. 60 seconds.
- Service temperature range -20°C to 70°C

Second layer

- 180° Peel strength test on stainless steel (FTM 1) is paper tear.
- Loop tack test (FTM 9) acceptance value min 6.0 N.
- 180° Peel strength test internal standard (PK/QC/21) min. 60 seconds.
- Service temperature range -20°C to 70°C

**RELEASE LINER**

**First Layer**

Basis weight  
 Thickness  
 Tensile strength (MD)  
 Tensile strength (CD)  
 Release force label paper

**GLASSINE RELEASE PAPER**

60 gsm ± 4%  
 55 µm ± 5 µm  
 7.46 kg/ 15 mm  
 4.26 kg/ 15 mm  
 Low release type : 0 – 15 gf



# TECHNICAL DATA SHEET

## RELEASE LINER

### Second Layer

Basis weight	60 gsm ± 4%
Thickness	55 µm ± 5 µm
Tensile strength (MD)	7.46 kg/ 15 mm
Tensile strength (CD)	4.26 kg/ 15 mm
Release force label paper	Low release type : 0 – 15 gf

## GLASSINE RELEASE PAPER

## SHELF LIFE

One year when stored at room temperature (25°C; 55%RH)

## OTHER INFORMATION

Product structure



Total thickness 297 µm ± 10%

Due to the wide variety of possible uses and applications, customers should determine the suitability for their specific purpose before to use.