


Product

LP-Thermal TC-WG55 “CAMEL”

Sales Code : LPTCAGE1C0 | Issued on : 11-10-2024

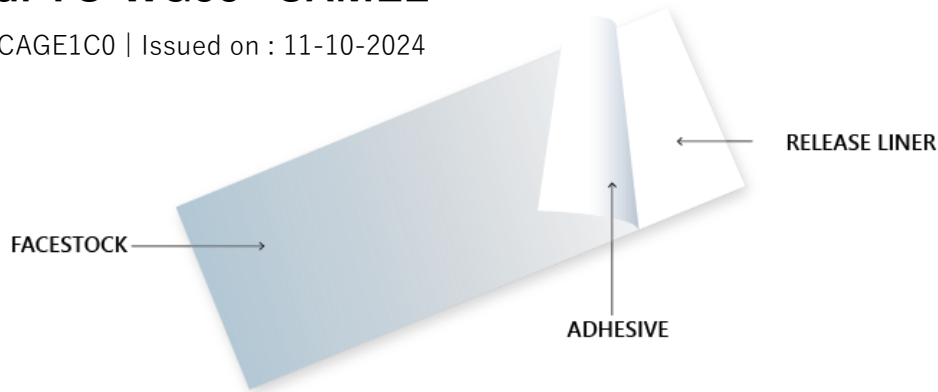

FACESTOCK

Basis weight
 Tensile strength (MD)
 Tensile strength (CD)

THERMAL PAPER

62 gsm ± 4%
 4.72 kg/15 mm
 4.16 kg/15 mm

ADHESIVE

Description

Camel adhesive formulation is aqueous dispersion of an acrylic copolymer which is a special adhesive for label stock.

Application Test

- 180° Peel strength test on stainless steel (FTM 1) is paper tear.
- Loop tack test (FTM 9) is 12.695 N (Acceptance value min 6.0 N).
- 180° Peel strength test internal standard (PK/QC/21) is 1157 seconds (Acceptance value min. 60 seconds).
- The printed image contrast will be lacked if contact with water directly

RELEASE LINER

Basis weight
 Thickness
 Tensile strength (MD)
 Tensile strength (CD)
 Release force label paper

GLASSINE RELEASE PAPER

56 gsm ± 4%
 50 µm ± 5 µm
 6.37 kg/ 15 mm
 3.78 kg/ 15 mm
 Low release type : 0 – 15 gf

SHELF LIFE

- One year when stored at room temperature (25°C; 55%RH)
- Avoidance of light

OTHER INFORMATION

Total thickness 125 µm ± 10%

Due to the wide variety of possible uses and applications, customers should determine the suitability for their specific purpose before to use.

