


Product

LP-WF60-RY72 “CAMEL”

Sales Code : LPHBEGC1C0 | Issued on : 24-10-2024

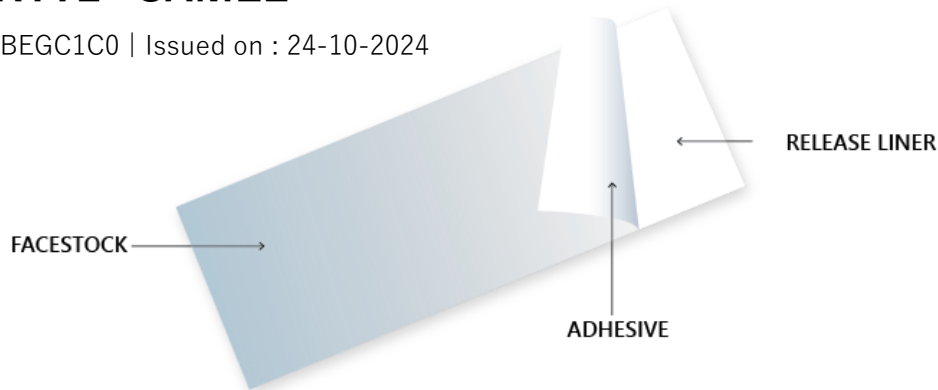

FACESTOCK

Color and appearance
 Basis weight
 Thickness
 Tensile strength (MD)
 Tensile strength (CD)

WOODFREE WHITE PAPER

White
 60 gsm ± 4%
 77 µm ± 5 µm
 5.08 kg/15 mm
 2.09 kg/15 mm

ADHESIVE

Description

Camel adhesive formulation is aqueous dispersion of an acrylic copolymer which is a special adhesive for label stock.

Application Test

- 180° Peel strength test on stainless steel (FTM 1) is paper tear.
- Loop tack test (FTM 9) is 8.723 N (Acceptance value min 6.0 N).
- 180° Peel strength test internal standard (PK/QC/21) is 824 seconds (Acceptance value min. 45 seconds).
- Service temperature range -20°C to 70°C

RELEASE LINER

Basis weight
 Thickness
 Tensile strength (MD)
 Tensile strength (CD)
 Release force label paper

WOODFREE LIGHT YELLOW WITH PE (POLYETHYLENE) LAMINATION

72 gsm ± 4%
 89 µm ± 10 µm
 7.10 kg/ 15 mm
 3.69 kg/ 15 mm
 Low release type : 0 – 15 gf

SHELF LIFE

One year when stored at room temperature (25°C; 55%RH)

OTHER INFORMATION

Total thickness 172 µm ± 10%

Due to the wide variety of possible uses and applications, customers should determine the suitability for their specific purpose before to use.

