


**Product**

**LP-WF70-WG58 “CAMEL”**

Sales Code : LPHAAGW1C0 | Issued on : 24-10-2024

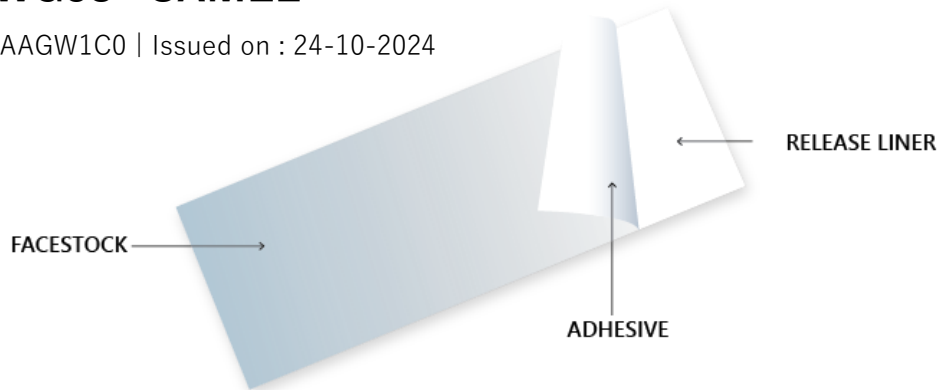

**FACESTOCK**

Color and appearance  
 Basis weight  
 Thickness  
 Tensile strength (MD)  
 Tensile strength (CD)

**WOODFREE WHITE PAPER**

White  
 70 gsm ± 4%  
 90 µm ± 5 µm  
 6.18 kg/15 mm  
 2.43 kg/15 mm

**ADHESIVE**

Description: Camel adhesive formulation is aqueous dispersion of an acrylic copolymer which is a special adhesive for label stock.

Application Test:

- 180° Peel strength test on stainless steel (FTM 1) is paper tear.
- Loop tack test (FTM 9) acceptance value min 6.0 N.
- 180° Peel strength test internal standard (PK/QC/21) min. 60 seconds.
- Service temperature range -20°C to 70°C

**RELEASE LINER**

Basis weight  
 Thickness  
 Tensile strength (MD)  
 Tensile strength (CD)  
 Release force label paper

**GLASSINE RELEASE PAPER**

60 gsm ± 4%  
 55 µm ± 5 µm  
 7.46 kg/ 15 mm  
 4.26 kg/ 15 mm  
 Low release type : 0 – 15 gf

**SHELF LIFE**

One year when stored at room temperature (25°C; 55%RH)

**OTHER INFORMATION**

Total thickness: 155 µm ± 10%

Due to the wide variety of possible uses and applications, customers should determine the suitability for their specific purpose before to use.

