


Product

LF-VWG90-CCKP "CAMEL"

Sales Code : LFLFFICBC0| Issued on : 17-01-2025

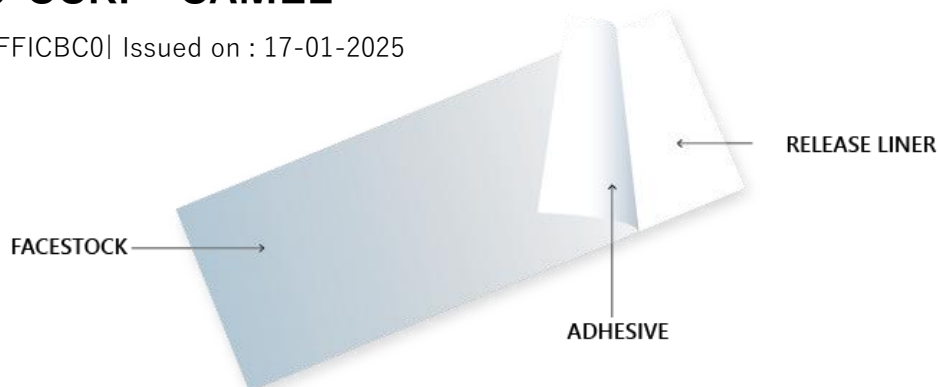

FACESTOCK

Appearance	White, soft
Thickness	0.09 mm ± 0.01 mm
Tensile strength (MD)	42.20 N/mm ²
Tensile strength (CD)	31.60 N/mm ²

PVC FILM

Appearance	White, soft
Thickness	0.09 mm ± 0.01 mm
Tensile strength (MD)	42.20 N/mm ²
Tensile strength (CD)	31.60 N/mm ²

ADHESIVE

Description
 Camel adhesive formulation is aqueous dispersion of an acrylic copolymer which is a special adhesive for label film of PVC large format containing a plasticizer-resistant that does not leave any residue on the substrate upon debonding.

Application Test

- 180° Peel strength test on stainless steel (FTM 1) after aging 20 minutes is 11.536 N.
- 180° Peel strength test on stainless steel (FTM 1) after aging 24 hours is 14.403 N.
- Loop tack test (FTM 9) acceptance value min 6.0 N.
- Service temperature range -10°C to 70°C.

RELEASE LINER

Basis weight	120 gsm ± 4%
Thickness	125 µm ± 10 µm
Tensile strength (MD)	10.34 kg/15 mm
Tensile strength (CD)	4.57 kg/15 mm
Release force label film	Low release type : 0 – 15 gf

CLAY COATED KRAFT

SHELF LIFE

One year when stored at room temperature (25°C; 55%RH)

OTHER INFORMATION

Total thickness 235 µm ± 10%



TECHNICAL DATA SHEET

Due to the wide variety of possible uses and applications, customers should determine the suitability for their specific purpose before to use.

