


**Product**

**LF. INKJET WG-WG58 "CAMEL"**

Sales Code : LFJIAIW1C0 | Issued on : 22-01-2025

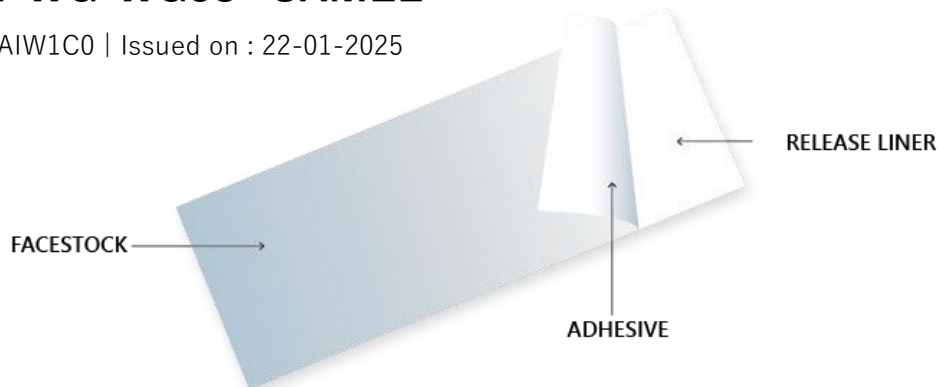

**FACESTOCK**

Color and appearance  
 Thickness  
 Tensile strength (MD)  
 Tensile strength (CD)

**BOPP (BIAXIALLY ORIENTED POLYPROPYLENE) FILM**

White top coated for printability  
 90  $\mu\text{m} \pm 6 \mu\text{m}$   
 92.24 N/mm<sup>2</sup>  
 149.96 N/mm<sup>2</sup>

**ADHESIVE**

Description  
 Camel adhesive formulation is aqueous dispersion of an acrylic copolymer which is a special adhesive for label stock.

Application Test

- 180° Peel strength test on stainless steel (FTM 1) is 13.581 N.
- Loop tack test (FTM 9) acceptance value min 7.0 N.
- 180° Peel strength test internal standard (PK/QC/21) min. 90 seconds.
- Service temperature range -10°C to 70°C

**RELEASE LINER**

Basis weight  
 Thickness  
 Tensile strength (MD)  
 Tensile strength (CD)  
 Release force label film

**GLASSINE RELEASE PAPER**

59 gsm  $\pm 4\%$   
 52  $\mu\text{m} \pm 5 \mu\text{m}$   
 8.27 kg/ 15 mm  
 3.53 kg/ 15 mm  
 Low release type : 0 – 15 gf

**SHELF LIFE**

One year when stored at room temperature (25°C; 55%RH)

**OTHER INFORMATION**

Total thickness 163  $\mu\text{m} \pm 10\%$

Due to the wide variety of possible uses and applications, customers should determine the suitability for their specific purpose before to use.

